

THOMSON

DELPHION

RESEARCH

PRODUCTS

INSIDE DELPHION

Log On | My Account | Products

Search: Quick/Number Boolean Advanced

The Delphion Integrated View

Get Now: ☒ PDF | [More choices...](#)Tools: Add to Work File: [Create new Wor](#)View: [INPADOC](#) | Jump to: [Top](#)  Go to: [Derwent...](#) [Ema](#)Title: **JP4206366A2: FLAT BATTERY**Country: **JP** JapanKind: **A**Inventor: **NAKAI KENJI;**
HIGASHIMOTO KOJI;
HIRONAKA KENSUKE;
HAYAKAWA TAKUMI;
KOMAKI AKIO;
NAKANAGA TAKEFUMI;
TANIGUCHI MASATOSHI;Assignee: **SHIN KOBE ELECTRIC MACH CO LTD**
OTSUKA CHEM CO LTD
[News, Profiles, Stocks and More about this company.](#)Published / Filed: **1992-07-28 / 1990-11-30**Application Number: **JP1990000333743**IPC Code: **H01M 10/40; H01M 4/02**Priority Number: **1990-11-30 JP1990000333743**

Abstract:

... PURPOSE: To prevent the aggravation of the battery performance by laminating a flat positive electrode active material and a negative electrode active material through a solid electrolyte, covering these generating elements with a collector, divisionally forming the positive electrode active material on the collector, and sealing the peripheral part by a sealing material.

... CONSTITUTION: On a stainless foil used as both a battery sheath and a collector 1, an aqueous solution of vanadium pentoxide which is a positive electrode material 2 is finely applied by means of screen printing, dried and heated. For example, a 1,2-dimethoxyethane(DME) solution of a polyphosphadine derivative in which 1mol/l of lithium perchlorate is dissolved is applied thereon by means of screen printing, and the DME is evaporated to form a solid electrolyte 3. A metal lithium foil is stuck thereon as a negative electrode active material 4, and further covered with the stainless foil of a collector 1', and the peripheral part is thermally fused by a sealing material 5 such as a modified polyethylene resin and sealed. Thus, the aggravation of the battery performance can be prevented.

... COPYRIGHT: (C)1992,JPO&Japio.

Family: **None**Other Abstract **None**

Info:



[Nominate](#)

[this for the Gallery...](#)

© 1997-2003 Thomson Delphion [Research Subscriptions](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact](#)

THOMSON
DELPHION

RESEARCH

PRODUCTS

INSIDE DELPHION

My Account | Products

Search: Quick/Number Boolean Advanced

The Delphion Integrated View

Get Now: ☒ PDF | More choices....

Tools: Add to Work File: Create new Wor

View: INPADOC | Jump to: Top

Go to: Derwent...

☐ Ema

Title: JP4206366A2: FLAT BATTERY

Country: JP Japan.

Kind: A

Inventor: NAKAI KENJI;
HIGASHIMOTO KOJI;
HIRONAKA KENSUKE;
HAYAKAWA TAKUMI;
KOMAKI AKIO;
NAKANAGA TAKEFUMI;
TANIGUCHI MASATOSHI;Assignee: SHIN KOBE ELECTRIC MACH CO LTD.
OTSUKA CHEM CO LTD.
[News, Profiles, Stocks and More about this company.](#)

Published / Filed: 1992-07-28 / 1990-11-30.

Application Number: JP1990000333743

IPC Code: H01M 10/40; H01M 4/02;

Priority Number: 1990-11-30 JP1990000333743

Abstract:

PURPOSE: To prevent the aggravation of the battery performance by laminating a flat positive electrode active material and a negative electrode active material through a solid electrolyte, covering these generating elements with a collector, divisionally forming the positive electrode active material on the collector, and sealing the peripheral part by a sealing material.

CONSTITUTION: On a stainless foil used as both a battery sheath and a collector 1, an aqueous solution of vanadium pentoxide which is a positive electrode material 2 is finely applied by means of screen printing, dried and heated. For example, a 1,2-dimethoxyethane(DME) solution of a polyphosphadine derivative in which 1mol/l of lithium perchlorate is dissolved is applied thereon by means of screen printing, and the DME is evaporated to form a solid electrolyte 3. A metal lithium foil is stuck thereon as a negative electrode active material 4, and further covered with the stainless foil of a collector 1', and the peripheral part is thermally fused by a sealing material 5 such as a modified polyethylene resin and sealed. Thus, the aggravation of the battery performance can be prevented.

COPYRIGHT: (C)1992,JPO&Japio.

Family: None

Other Abstract: None

Info:



[Nominate](#)

[this for the Gallery...](#)

© 1997-2003 Thomson Delphion ... [Research Subscriptions](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact](#)



(19)

(11) Publication number: **04**

Generated Document.

PATENT ABSTRACTS OF JAPAN(21) Application number: **02333743**(51) Intl. Cl.: **H01M 10/40 H01M 4/02**(22) Application date: **30.11.90**

(30) Priority:

(43) Date of application
publication: **28.07.92**(84) Designated contracting
states:(71) Applicant: **SHIN KOBE ELECTRIC
LTD.
OTSUKA CHEM CO LT**(72) Inventor: **NAKAI KENJI
HIGASHIMOTO KOJI
HIRONAKA KENSUKE
HAYAKAWA TAKUMI
KOMAKI AKIO
NAKANAGA TAKEFUM
TANIGUCHI MASATOSH**

(74) Representative:

(54) FLAT BATTERY


(57) Abstract:

PURPOSE: To prevent the aggravation of the battery performance by laminating a flat positive electrode active material and a negative electrode active material through a solid electrolyte, covering these generating elements with a collector, divisionally forming the positive electrode active material on the collector, and sealing the peripheral part by a sealing material.

CONSTITUTION: On a stainless foil used as both a battery sheath and a collector 1, an aqueous solution of vanadium pentoxide which is a positive electrode material 2 is finely applied by means of screen printing, dried and heated. For example, a 1,2-dimethoxyethane(DME) solution of a

polyphosphadine derivative in which 1mol/l of lithium perchlorate is dissolved is applied thereon by means of screen printing, and the DME is evaporated to form a solid electrolyte 3. A metal lithium foil is stuck thereon as a negative electrode active material 4, and further covered with the stainless foil of a collector 1', and the peripheral part is thermally fused by a sealing material 5 such as a modified polyethylene resin and sealed. Thus, the aggravation of the battery performance can be prevented.

COPYRIGHT: (C)1992,JPO&Japio

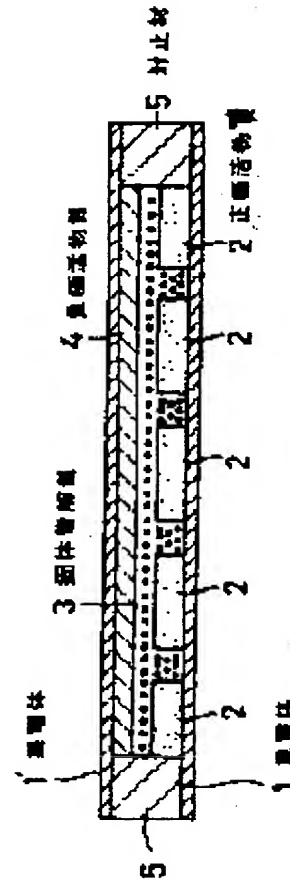



(19)

(11) Publication number: **04**

Generated Document.

PATENT ABSTRACTS OF JAPAN(21) Application number: **02333743**(51) Intl. Cl.: **H01M 10/40 H01M 4/02**(22) Application date: **30.11.90**

(30) Priority:

(43) Date of application
publication: **28.07.92**(84) Designated contracting
states:(71) Applicant: **SHIN KOBE ELECTRIC
LTD
OTSUKA CHEM CO LT**(72) Inventor: **NAKAI KENJI
HIGASHIMOTO KOJI
HIRONAKA KENSUKE
HAYAKAWA TAKUMI
KOMAKI AKIO
NAKANAGA TAKEFUM
TANIGUCHI MASATOSH**

(74) Representative:

(54) FLAT BATTERY

(57) Abstract:

PURPOSE: To prevent the aggravation of the battery performance by laminating a flat positive electrode active material and a negative electrode active material through a solid electrolyte, covering these generating elements with a collector, divisionally forming the positive electrode active material on the collector, and sealing the peripheral part by a sealing material.

CONSTITUTION: On a stainless foil used as both a battery sheath and a collector 1, an aqueous solution of vanadium pentoxide which is a positive electrode material 2 is finely applied by means of screen printing, dried and heated. For example, a 1,2-dimethoxyethane(DME) solution of a

polyphosphadine derivative in which 1mol/l of lithium perchlorate is dissolved is applied thereon by means of screen printing, and the DME is evaporated to form a solid electrolyte 3. A metal lithium foil is stuck thereon as a negative electrode active material 4, and further covered with the stainless foil of a collector 1', and the peripheral part is thermally fused by a sealing material 5 such as a modified polyethylene resin and sealed. Thus, the aggravation of the battery performance can be prevented.

COPYRIGHT: (C)1992,JPO&Japio

